

HELI

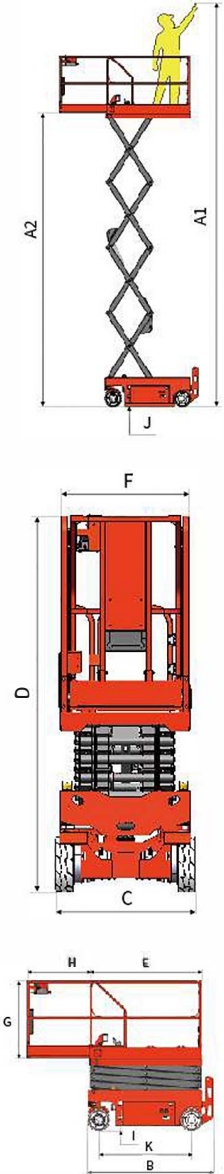
JS07

Self Propelled Scissor Type Aerial Work Platform



Manufacturer's Data and Design Characteristics

Manufacture		HELI					
1.1	Model			JS0607	JS0607E	JS0607W	JS0607WE
	Dmension						
2.1	Max. working height	A1	m	7.8	7.8	7.8	7.8
2.2	Max. platform height	A2	m	5.8	5.8	5.8	5.8
2.3	Overall length	B	m	1.84	1.84	1.84	1.84
2.4	Overall width	C	m	0.76	0.76	0.81	0.81
2.5	Overall height (guardrail unfolded)	D	m	2.18	2.18	2.18	2.18
2.6	Overall height (guardrail folded)		m	1.84	1.84	1.84	1.84
2.7	Platform size (length x width)	E x F	m	1.65x0.76	1.65x0.76	1.65x0.76	1.65x0.76
2.8	Guardrail height	G	m	1.1	1.1	1.1	1.1
2.9	Extension size of platform	H	m	0.9	0.9	0.9	0.9
2.10	Ground clearance (retracted state)	I	mm	60	60	60	60
2.11	Ground clearance (lifting state)	J	mm	15	15	15	15
2.12	Wheelbase	K	m	1.36	1.36	1.36	1.36
Performance							
3.1	Max. number of workers (indoor / outdoor)			2 / -	2 / -	2 / 1	2 / 1
3.2	Rated capacity		kg	230	230	230	230
3.3	Rated capacity of extension platform		kg	120	120	120	120
3.4	Drive speed (retracted state)		km/h	0-4	0-4	0-4	0-4
3.5	Drive speed (lifting state)		km/h	0-0.8	0-0.8	0-0.8	0-0.8
3.6	Min. turning radius (inside)		m	0	0	0	0
3.7	Min. turning radius (outside)		m	1.55	1.55	1.55	1.55
3.8	Lifting /Falling time		s	18/28	18/28	18/28	18/28
3.9	Max. work slop (forward and backward / left and right)		°	3°/1.5°	3°/1.5°	3°/1.5°	3°/1.5°
3.10	Max. allowable wind speed (indoor / outdoor)		mys	0/0	0/0	0/12.5	0/12.5
3.11	Max. allowable lateral force (indoor / outdoor)		N	400/0	400/0	400/200	400/200
3.12	Gradeability		%	25	30	25	30
3.13	Control type			Proportional control	Proportional control	Proportional control	Proportional control
3.14	Drive			Dual front wheels	Dual front wheels	Dual front wheels	Dual front wheels
3.15	Brake			Dual rear wheels	Dual rear wheels	Dual rear wheels	Dual rear wheels
3.16	Tyre size		mm	323*100	323*100	323*100	323*100
Power							
4.1	Lifting / driving motor power		kw	3.3	2.2/0.7x2	3.3	2.2/0.7x2
4.2	Battery voltage / capacity		V/Ah	6x4/225	6x4/225	6x4/225	6x4/225
4.3	Charger input voltage		VAC	100-240	100-240	100-240	100-240
4.4	Charger output current		A	36	36	36	36
4.5	Control voltage		VDC	24	24	24	24
Weight							
5.1	Overall weight		kg	1480	1480	1500	1500


Standard configurations

Proportional control	Extension platform	Emergency stop device	Intelligent danger alarm	Working timer	Emergency falling system	Automatic brake system	Action buzzer	repair safety arm
Manual brake release	Automatic fault diagnosis	Drive at all height	Charging action interlock	Auto-protection on holes on the ground	Working strobe warning light	Oil pipe explosion proof system	Anti-pinch system	Standard transportati on truck hole

Optional configurations

AC power to platform	Lithium battery	Platform anti-collision device	Pneumatic pipe to platform	Generator to platform	Intelligent interlock	Folding guardrail	Safety pedal switch	Platform working light
----------------------	-----------------	--------------------------------	----------------------------	-----------------------	-----------------------	-------------------	---------------------	------------------------



Repair safety arm



Split explosion proof valve



Rotary maintenance pallet



Small turning radius



Auto-protection on holes on the ground



Strong climbing ability



Emergency falling and dual flashing warning lights

ÖZİSMAK
SMZ
 Lift + Vehicle

ÖZİSMAK İSTİF MAKİNELERİ SANAYİ ve TİC. LTD. ŞTİ.

Merkez Adres : İkitelli O.S.B. Dolapdere San. Sit. 25. Ada No:14 Başakşehir/İstanbul
 Telefon : +90 (212) 671 50 24 pbx Fax : +90 (212) 671 49 82
 Fabrika Adres : Türkçücü Mah. Türkçücü O.S.B. Yılmaz Alpaslan Cad. No:64 Çorlu/Tekirdağ
 Telefon : +90 (282) 681 80 77 pbx E-mail : info@ozismak.com www.ozismak.com